



Power Units in Modular Design

Operating pressure 30 to 500 bar, flow rate 0.9 to 12 l/min
reservoir sizes 11 l, 27 l, 40 l, 63 l



Application

For the operation of hydraulic clamping fixtures and other handling and clamping systems on machine tools.

Description

The power units of this series consist of individual modules that are selected depending on the application and are assembled on the basis of a type code to a power unit ready for use.

Modules

- Power unit (reservoir, pump, motor)
- Connecting block basic functions
- Valve block with up to 4 control circuits
- Electronics

Characteristics

- for single and double acting cylinders
- continuously adjustable operating pressure
- expandable to up to 8 pressure circuits
- constant flow rate
- wide range of valves
- wide range of hydraulic functions
- energy-saving mode S3 (intermittent mode) or S6 (unpressurised cycle)
- supplied ready for connection

Equipment - Standard

- connecting block with pressure relief valve
- pressure filter 10 µm
- oil level gauge
- oil temperature gauge
- design without piping

Equipment - Options

- electronic system pressure switch with simplified pressure adjustment by teach-in function
- pressure switch for machine tool interlock mechanically or electronically
- electrical oil level control
- electrical temperature control
- return filter
- electrical filter control
- electric control
- terminal box
- foot switch or manual switch
- key-operated switch

Performance data


| p max. [bar] | Q [l/min] | Reservoir [l] |
|--------------|-----------|---------------|
| 120 | 12 | 27 40 63 |
| 160 | 8.8 | 27 40 63 |
| 160 | 12 | 40 63 |
| 200 | 1.5 | 11 27 40 63 |
| 200 | 3.3 | 11 27 40 63 |
| 200 | 4.5 | 11 27 40 63 |
| 200 | 6.2 | 27 40 63 |
| 200 | 8.8 | 40 63 |
| 350 | 3.6 | 27 40 63 |
| 350 | 5.3 | 40 63 |
| 400 | 2.5 | 11 27 40 63 |
| 450 | 4.2 | 40 63 |
| 500 | 0.9 | 11 27 40 63 |
| 500 | 1.5 | 11 27 40 63 |
| 500 | 2.6 | 27 40 63 |
| 500 | 3.7 | 40 63 |
| 500 | 0.7/5.2 | 11 27 40 63 |
| 500 | 0.7/8.8 | 11 |

Further pump variants and equipments are available on request.

Valve block

Control circuit **V1 XX X XXX SX** ... **V4**

Poppet/spool valves, function triggering, additional functions (see page 8)



Electronics **E X**


Electric control, terminal box, (see page 11)



Connecting block

Basic functions **A XXX**

System pressure switch, unpressurised cycle, intermittent mode, filter control, oil control (see page 6)



Basic power unit **PM XX**

Motor rating 0.75 – 3.0 kW
Reservoir sizes 11, 27, 40, 63 litres
(see page 4)

Power units in modular design

Type code "structure and determination"

Type code: PMXX_AXXX_V1-XX X XXX SX_V2-XX X XXX SX_V3-XX X XXX SX_V4-XX X XXX SX_EX

Basic power unit

Basic functions

Control circuit 1

Control circuit 2

Control circuit 3

Control circuit 4


Electronics

Switch variant

Switch variant

Switch variant

Switch variant

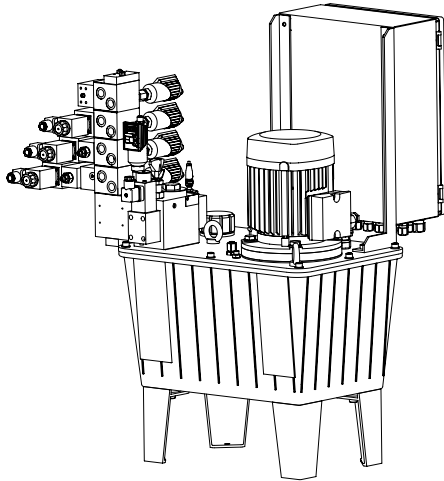

Modular design

By the use of pre-assembled modules, module power units can be flexibly implemented in the short term and in a cost-effective way.

The modular design and numerous design options allow a flexible adaptation to the respective application.

Module power units are particularly suitable as a base to build complex hydraulic controls. A linkable basic block offers the user the possibility to expand the power unit with different function and control elements for the specific application.

Determination of the type code

A type code that results from the used modules is available for the different module components and results in the final part number for the power unit.

To select the correct arrangement, size and performance of the individual components, you will find all parameters and their type code on the following pages.

Safety features

- Precisely defined clamping force by continuously adjustable operating pressure
- Electronic system pressure switch with digital pressure display (option)
- Repeatability ± 1 bar
- Renewed oil supply after a pressure drop of max. 10 %
- Machine tool interlock (option) at a pressure drop of max. 20 %, is automatically updated in case of pressure adjustment
- Oil level and temperature control (option)
- Precise oil temperature display by stick thermometer
- Pressure filter 10 μm in the connecting block
- Screen disks in the ports
- Control voltage 24 V DC
- Pressure maintenance in case of power failure due to hermetically sealed poppet valves
- Overpressure protection of the individual pressure circuits (option)

Important notes:

These power units are exclusively designed for the industrial use of pressure generators for hydraulic fixtures.

All connected hydraulic components must be leakage-free and designed for the maximum operating pressure of the power unit.

The power unit generates very high pressures.

The connected cylinders generate very high forces so that there is a permanent danger of crushing in the effective area of the piston rod.

The manufacturer of the fixture or the machine is obliged to provide effective protection devices.

Installation, start up and maintenance have to be made according to the operating manual by authorised experts.

Technical data

Designs

- Gear pump max. 200 bar
- Piston pump max. 500 bar
- Pump combination max. 80 / 500 bar

Type of mounting foot mounting

Port size G 1/4, G 3/8 and G 1/2

Direction of rotation

(view from above onto the drive shaft)

- Gear pump clockwise rotation
- Piston pump any
- Pump combination counterclockwise rotation

Mounting position upright

Usable oil volume 50 % of reservoir volume

Vol. efficiency $\eta_{\text{vol}} = 85-95 \%$

Electrical characteristics - Motor

Nominal voltage* 400 V
up to 2.2 kW star connection
400 V
from 3 kW delta connection

Type squirrel cage rotor, 4-pole

Voltage type* three-phase AC voltage, 50 Hz

Code class IP 55

Max. relative cycle time depending on the operating pressure specifications for 100 % or 40 % ED see page 4

The calculation of the relative duty cycle is based on a cycle time of 10 min. With 40 % ED, e.g. the maximum load within the cycle should not exceed 4 min.



During the remaining time, the motor can carry a load of up to 50 % of the nominal output and should run continuously.

* Other voltages/frequencies as well as special approvals on request.

Power units in modular design

Hydraulic circuit diagram for example power unit


B0 = Electronic system pressure switch with teach-in function

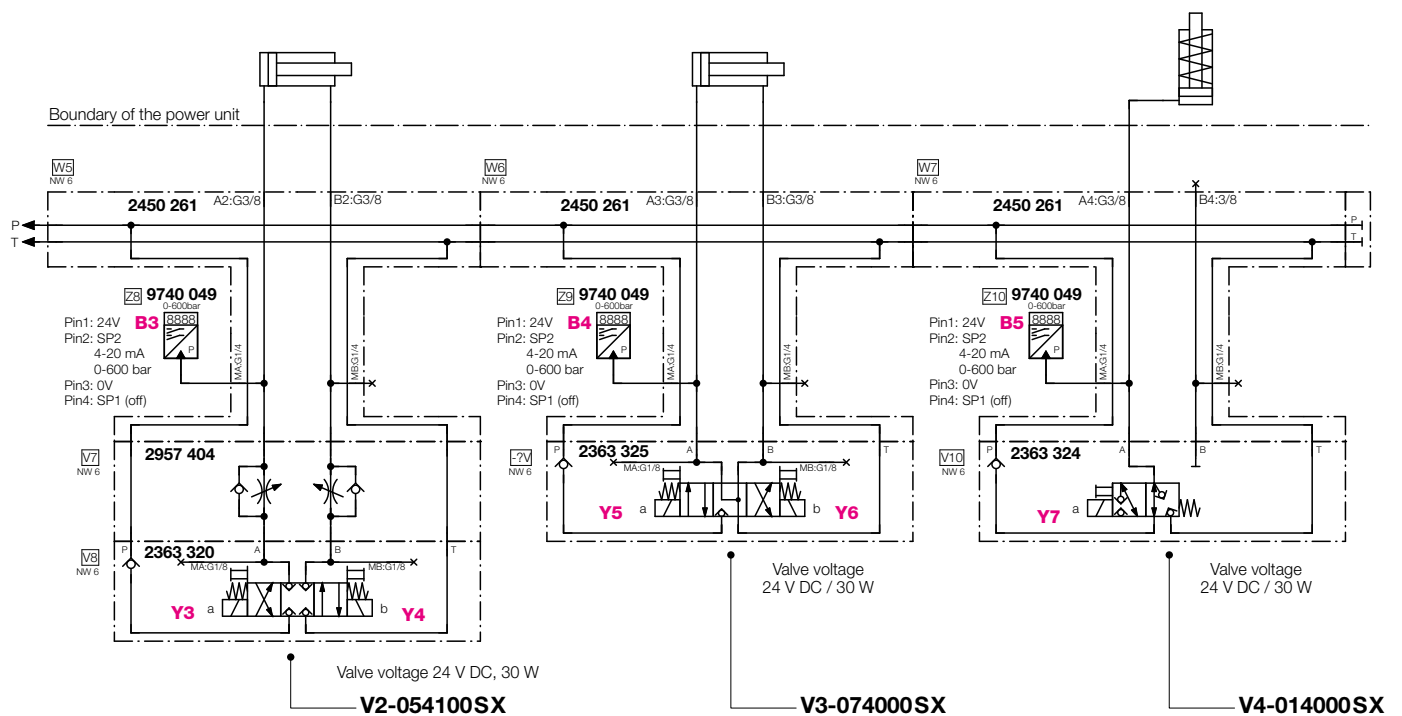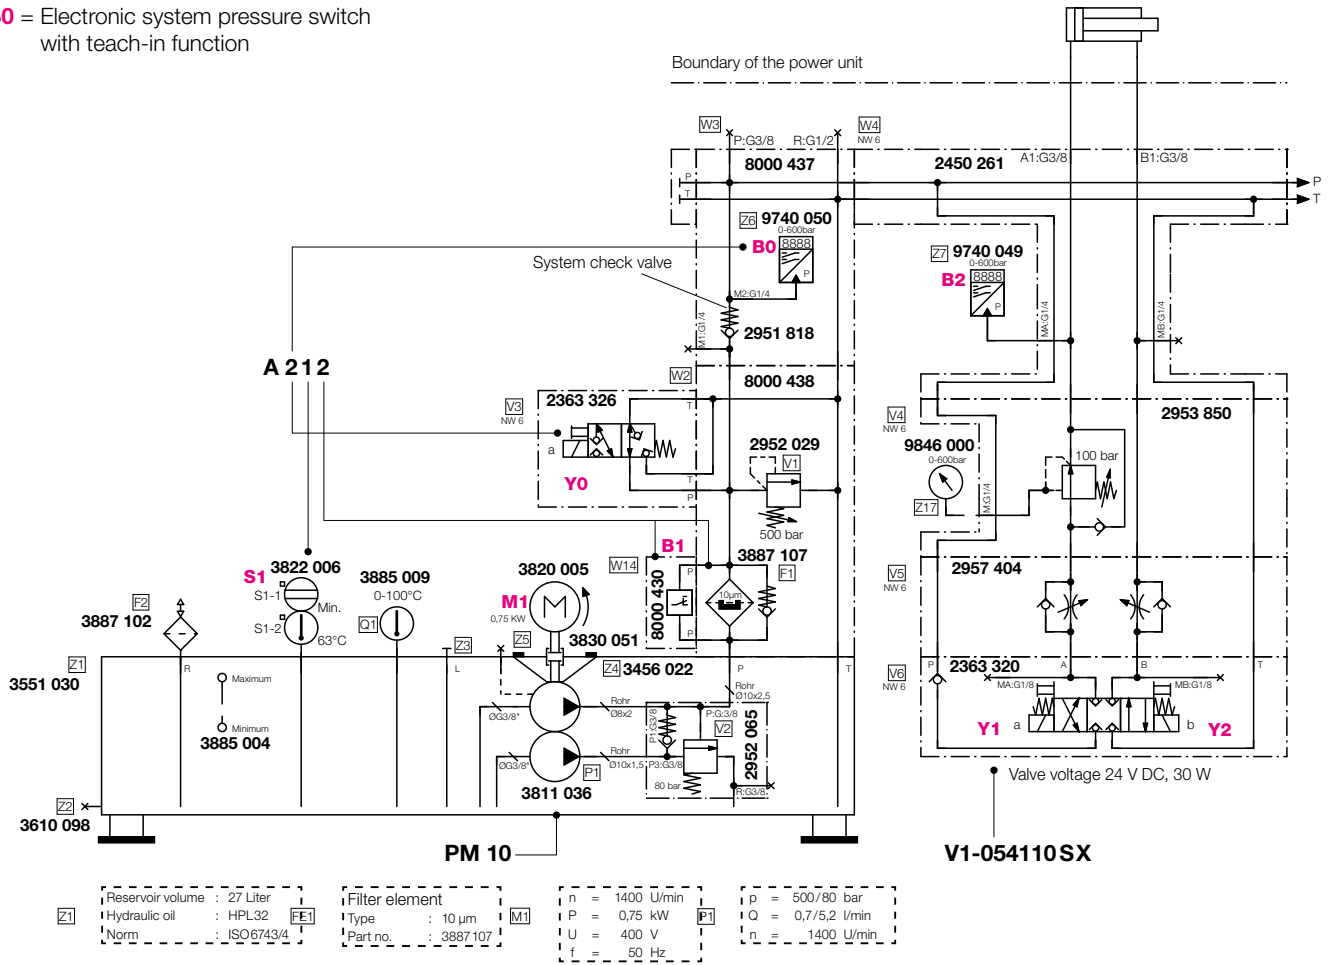

Power units in modular design

Type code for power unit size "PMXX"

Type code: **PMXX**_A_{XXX}_V1-XX X XXX SX_V2-XX X XXX SX_V3-XX X XXX SX_V4-XX X XXX SX_EX

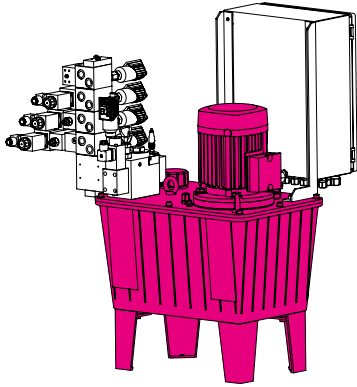

Basic power unit

The basic selection takes place based on operating pressure p and flow rate Q . The size of the reservoir depends on the application conditions (e. g. environmental temperature, cycle time and function)

* Note

In case of the two-stage pump (RZ) the gear pump (large flow rate) is switched to unpressurised cycles by the integrated idling control valve as soon as a pressure of 80 bar is exceeded. Up to 80 bar, both flow rates will add up.

4 reservoir sizes: 11 l, 27 l, 40 l, 63 l

5 motor sizes: 0.75 kW, 1.1 kW, 1.5 kW, 2.2 kW, 3.0 kW

15 pump types: 0.9 to 12 l/min flow rate

(gear pump, piston pump and two-stage pump*)

Example:

Reservoir 11 l, max. 200 bar, gear pump 1.5 l/min, 0.75 kW = **PM 01**

Reservoir 27 l, max. 350 bar, piston pump 3.6 l/min, 2.2 kW = **PM 19**

| Operating pressure [bar] | | Flow rate Q [l/min] | Motor rating P [kW] | Reservoir volume V [l] | Pump type | PM XX |
|--------------------------|-------------|------------------------|------------------------|---------------------------|----------------|-------|
| at 100% ED | at 40% ED** | | | | | |
| 425 | 500 | 0.9 | 0.75 | 11 | Piston pump | 02 |
| 425 | 500 | 0.9 | 0.75 | 27 | Piston pump | 09 |
| 425 | 500 | 0.9 | 0.75 | 40 | Piston pump | 21 |
| 425 | 500 | 0.9 | 0.75 | 63 | Piston pump | 38 |
| 375 | 500 | 1.5 | 1.1 | 11 | Piston pump | 05 |
| 375 | 500 | 1.5 | 1.1 | 27 | Piston pump | 12 |
| 375 | 500 | 1.5 | 1.1 | 40 | Piston pump | 24 |
| 375 | 500 | 1.5 | 1.1 | 63 | Piston pump | 41 |
| 430 | 500 | 2.6 | 2.2 | 27 | Piston pump | 18 |
| 430 | 500 | 2.6 | 2.2 | 40 | Piston pump | 30 |
| 430 | 500 | 2.6 | 2.2 | 63 | Piston pump | 47 |
| 415 | 500 | 3.7 | 3.0 | 40 | Piston pump | 34 |
| 415 | 500 | 3.7 | 3.0 | 63 | Piston pump | 51 |
| 500 | 500 | 0.7/5.2* | 0.75 | 11 | Two-stage pump | 03 |
| 500 | 500 | 0.7/8.8* | 1.5 | 11 | Two-stage pump | 54 |
| 500 | 500 | 0.7/5.2* | 0.75 | 27 | Two-stage pump | 10 |
| 500 | 500 | 0.7/5.2* | 0.75 | 40 | Two-stage pump | 22 |
| 500 | 500 | 0.7/5.2* | 0.75 | 63 | Two-stage pump | 39 |
| 365 | 450 | 4.2 | 3.0 | 40 | Piston pump | 35 |
| 365 | 450 | 4.2 | 3.0 | 63 | Piston pump | 52 |
| 310 | 400 | 2.5 | 1.5 | 11 | Piston pump | 07 |
| 310 | 400 | 2.5 | 1.5 | 27 | Piston pump | 14 |
| 310 | 400 | 2.5 | 1.5 | 40 | Piston pump | 26 |
| 310 | 400 | 2.5 | 1.5 | 63 | Piston pump | 43 |
| 310 | 350 | 3.6 | 2.2 | 27 | Piston pump | 19 |
| 310 | 350 | 3.6 | 2.2 | 40 | Piston pump | 31 |
| 310 | 350 | 3.6 | 2.2 | 63 | Piston pump | 48 |
| 290 | 350 | 5.3 | 3.0 | 40 | Piston pump | 36 |
| 290 | 350 | 5.3 | 3.0 | 63 | Piston pump | 53 |
| 200 | 200 | 1.5 | 0.75 | 11 | Gear pump | 01 |
| 200 | 200 | 1.5 | 0.75 | 27 | Gear pump | 08 |
| 200 | 200 | 1.5 | 0.75 | 40 | Gear pump | 20 |
| 200 | 200 | 1.5 | 0.75 | 63 | Gear pump | 37 |
| 170 | 200 | 3.3 | 1.1 | 11 | Gear pump | 04 |
| 170 | 200 | 3.3 | 1.1 | 27 | Gear pump | 11 |
| 170 | 200 | 3.3 | 1.1 | 40 | Gear pump | 23 |
| 170 | 200 | 3.3 | 1.1 | 63 | Gear pump | 40 |
| 170 | 200 | 4.5 | 1.5 | 11 | Gear pump | 06 |
| 170 | 200 | 4.5 | 1.5 | 27 | Gear pump | 13 |
| 170 | 200 | 4.5 | 1.5 | 40 | Gear pump | 25 |
| 170 | 200 | 4.5 | 1.5 | 63 | Gear pump | 42 |
| 180 | 200 | 6.2 | 2.2 | 27 | Gear pump | 15 |
| 180 | 200 | 6.2 | 2.2 | 40 | Gear pump | 27 |
| 180 | 200 | 6.2 | 2.2 | 63 | Gear pump | 44 |
| 175 | 200 | 8.8 | 3.0 | 40 | Gear pump | 32 |
| 175 | 200 | 8.8 | 3.0 | 63 | Gear pump | 49 |
| 130 | 160 | 8.8 | 2.2 | 27 | Gear pump | 16 |
| 130 | 160 | 8.8 | 2.2 | 40 | Gear pump | 28 |
| 130 | 160 | 8.8 | 2.2 | 63 | Gear pump | 45 |
| 130 | 160 | 12 | 3.0 | 40 | Gear pump | 33 |
| 130 | 160 | 12 | 3.0 | 63 | Gear pump | 50 |
| 99 | 120 | 12 | 2.2 | 40 | Gear pump | 29 |
| 95 | 120 | 12 | 2.2 | 27 | Gear pump | 17 |
| 95 | 120 | 12 | 2.2 | 63 | Gear pump | 46 |

** see page 2 "Electrical characteristics - Motor"

Pumps

Piston pumps

| | |
|-------------------------|--|
| Type | radial piston pump |
| Nominal pressure max. | 500 bar |
| Flow rates* | 3.6 / 5.3 l/min to 350 bar 2.5 l/min to 400 bar 4.2 l/min to 450 bar 0.9 / 1.5 / 2.6 / 3.7 l/min to 500 bar |
| Direction of rotation** | any |
| Speed range | continuous operation 100...2000 1/min, short-time operation up to 2850 1/min |
| Feature | high-pressure application, harsh operating conditions (e.g. punching / stamping) |

Gear pumps

| | |
|-------------------------|---|
| Type | 2 opposite gears |
| Nominal pressure max. | 200 bar |
| Flow rates* | 1.5 / 3.3 / 4.5 / 6.2 / 8.8 l/min to 200 bar 12 l/min to 160 bar |
| Direction of rotation** | clockwise rotation |
| Speed range | 700...3000 1/min |
| Feature | intermediate-pressure application, high flow rate |

Two-stage pump

| | |
|-------------------------|---|
| Type | radial piston pump and gear pump screwed together continuous drive shaft |
| Nominal pressure max. | 500 bar |
| Flow rate* | up to approx. 80 bar total flow rate active (gear plus piston pump) from approx. 80 bar only flow rate of piston pump active |
| Direction of rotation** | counterclockwise rotation |
| Speed range | 700...2000 1/min, in short-time operation up to 2850 1/min |
| Feature | high flow rate up to approx. 80 bar, high pressure up to 500 bar |
| Typical application | quickly move large volume consumers and clamp them with high pressure |

* at rated speed 1450 1/min


** direction of rotation (view from above onto the drive shaft)

Different flow rates and other pumps are available on request.

Power units in modular design

Type code for connecting block basic function "Axxx"

Type code: PMXX_Axxx_V1-XX X XXX SX_V2-XX X XXX SX_V3-XX X XXX SX_V4-XX X XXX SX_EX

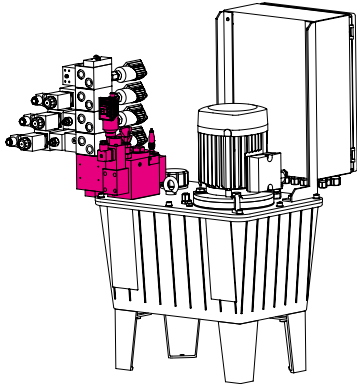

Standard equipment


- Connecting block with pressure relief valve
- System check valve
- Pressure filter 10 µm
- Oil level gauge
- Oil temperature gauge (stick thermometer)
- Filler and reservoir ventilation
- Prepared for additional features

Connecting block basic functions


In addition to the standard equipment, additional features for the basic unit can be selected.

| | Axxx |
|--|------|
| with pressure gauge, without system pressure switch, without valve for unpressurised cycle | 0 |
| with electronic system pressure switch for intermittent cycle | 1 |
| with electronic system pressure switch and valve for unpressurised cycle, $p_{max} = 500$ bar | 2 |
| with electronic system pressure switch and valve for unpressurised cycle, $p_{max} = 315$ bar | 3 |
| with pressure gauge, without system pressure switch, with valve for unpressurised cycle, $p_{max} = 500$ bar | 4 |
| with pressure gauge, without system pressure switch, with valve for unpressurised cycle, $p_{max} = 315$ bar | 5 |
| with visual temperature and oil level display (standard) | 0 |
| with temperature and oil level control switch and visual temperature and oil level display | 1 |
| with pressure filter (standard) | 0 |
| pressure and return filter | 1 |
| pressure filter with filter control | 2 |
| pressure filter and return filter with filter control | 3 |

Connecting block including pressure filter and pressure relief valve, P port G3/8, R port G1/2 and system check valve
 (The retrofitting of individual features is possible at any time).

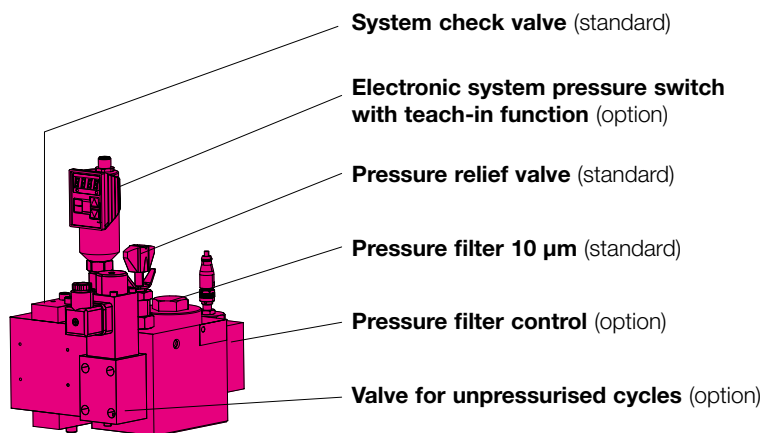

Additional options:

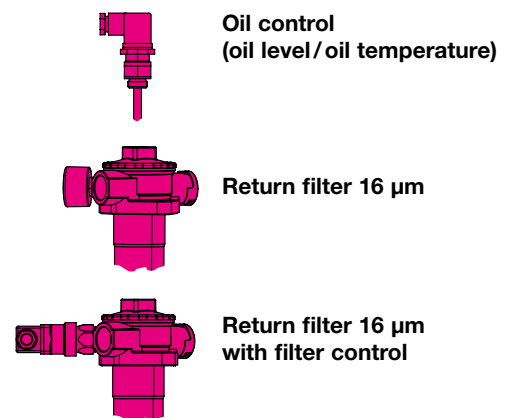

Note for teach-in function

For teaching, the desired switching as well as reverse switching points are calculated and saved by pressing the Enter/Set key of the system pressure switch. The system is thus set and ready for operation, parameterisation of individual values is not required.


Detailed operating instructions are available on request.

Monitoring functions - Power unit

Oil control (oil temperature too high or oil level too low)

| | |
|-----------------------------|---|
| Contact oil temperature | break contact, opens at approx. 63 °C |
| Contact oil level | make contact, closes when oil above the float |
| Type of connection | connector, 3-pin as per DIN 43650 Pin 1: common root Pin 2: level Pin 3: temperature |
| Max. switching voltage | 230 V AC |
| Max. switching current | 1 A |
| Max. contact rating | 10 VA |
| Medium temperature max. | 85 °C |
| Code class | IP 65 |
| For oil reservoir 11 litres | Part no. 3822008 |
| For oil reservoir 27 litres | Part no. 3822006 |
| For oil reservoir 40 litres | Part no. 3822048 |
| For oil reservoir 63 litres | Part no. 3822005 |

Note: The oil control can be retrofitted.
Several switching points for temperature and/or level on request.

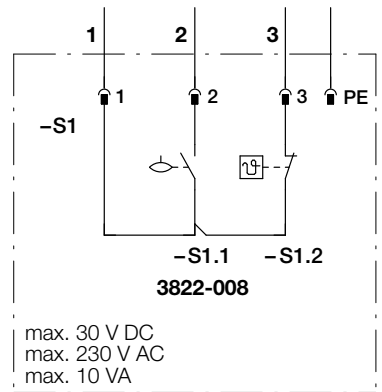


Pressure filter control

For plug-type connector with integrated function display
Plunger material stainless steel

| | |
|-------------------|-----------------------|
| Switching voltage | min. 12 V |
| Switching current | min. at 24 V 10 mA |
| Connection | connector, M12, 4-pin |
| Part no. | 8000430 |


Note: The pressure filter control can be retrofitted.

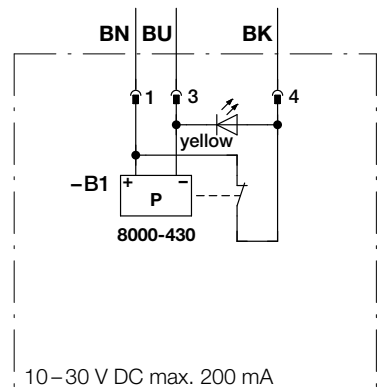

Return filter control

| | |
|------------------------|--|
| Operating pressure | 0 ... 10 bar |
| Material | body polyamide, connecting parts steel galvanised, membrane NBR, seal copper |
| Code class | IP 67 |
| Electrical connection | cable socket DIN 43650 - AF3 cable diameter 6 ... 8 mm |
| Max. switching voltage | 30 V DC |
| Max. switching current | 0.25 A |
| Max. contact rating | 3 W |
| Part no. | 3887121 |

Note: The return filter control can be retrofitted.

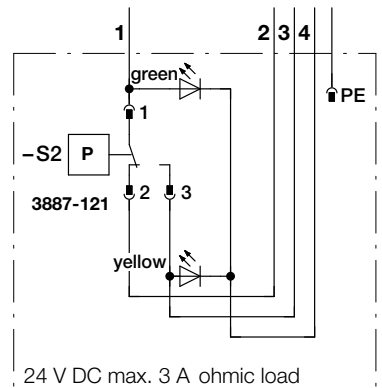

Power units in modular design

Type code for valve bloc for contro circuits “V1-XX X XXX SX” to “V4-XX X XXX SX”


Type code: PMXX_AXXX_V1-XX X XXX SX_V2-XX X XXX SX_V3-XX X XXX SX_V4-XX X XXX SX_EX

The determination of control circuit V2-XX X XXX SX, V3-XX X XXX SX and V4-XX X XXX SX is the same as of control circuit V1-XX X XXX SX.

| | | V1-XX X XXX SX |
|--|------------------------------------|-----------------------|
| Control valves | | |
| as reserve space | with blind plate | 00 |
| 3/2 directional poppet valve, 500 bar, without auxiliary energy P→A | 1 x single acting | 01 |
| 3/2 directional poppet valve, 500 bar, without auxiliary energy A→R | 1 x single acting | 02 |
| 3/2 directional poppet valve, 250 bar, without auxiliary energy P→A | 1 x single acting | 03 |
| 3/2 directional poppet valve, 250 bar, without auxiliary energy A→R | 1 x single acting | 04 |
| 4/3 directional poppet valve, 500 bar, without auxiliary energy all connections closed | 1 x double acting | 05 |
| 4/3 directional poppet valve, 250 bar, without auxiliary energy all connections closed | 1 x double acting | 06 |
| 4/3 directional poppet valve, 500 bar, without auxiliary energy A+B→R | 1 x double acting | 07 |
| 4/3 directional poppet valve, 250 bar, without auxiliary energy A+B→R | 1 x double acting | 08 |
| 2 x 3/2 directional poppet valve, 500 bar, without auxiliary energy P→A+B | 2 x single acting | 09 |
| 2 x 3/2 directional poppet valve, 500 bar, without auxiliary energy A+B→R | 2 x single acting | 10 |
| 2 x 3/2 directional poppet valve, 500 bar, without auxiliary energy P→A / B→R | 2 x single acting | 11 |
| 2 x 3/2 directional poppet valve, 250 bar, without auxiliary energy P→A+B | 2 x single acting | 12 |
| 2 x 3/2 directional poppet valve, 250 bar, without auxiliary energy A+B→R | 2 x single acting | 13 |
| 2 x 3/2 directional poppet valve, 250 bar, without auxiliary energy P→A / B→R | 2 x single acting | 14 |
| 2 x 4/2 directional spool valve, 315 bar, without auxiliary energy P→A / B→R | 1x double-acting, not leakage-free | 15 |
| 4/3 directional spool valve, 315 bar, without auxiliary energy all connections closed | 1x double-acting, not leakage-free | 16 |
| 4/3 directional spool valve, 315 bar, without auxiliary energy A+B→R | 1x double-acting, not leakage-free | 17 |
| 4/3 directional spool valve, 315 bar, without auxiliary energy P→R, A+B closed | 1x double-acting, not leakage-free | 18 |
| 4/3 directional spool valve, 315 bar, without auxiliary energy all connections connected | 1x double-acting, not leakage-free | 19 |
| without mounting plate, P and R closed | without | XX |
| Pressure switch | | |
| without pressure switch for machine tool interlock | | 0 |
| piston pressure switch in A for machine tool interlock | | 1 |
| piston pressure switch in B for machine tool interlock | | 2 |
| one each piston pressure switch in A + B for machine tool interlock | | 3 |
| electronic pressure switch in A for machine tool interlock | | 4 |
| electronic pressure switch in B for machine tool interlock | | 5 |
| one each electronic pressure switch in A + B for machine tool interlock | | 6 |
| Flow control valves | | |
| without flow control valve | | 0 |
| with flow control valve in A+B, supply throttling, 500 bar | | 1 |
| with flow control valve in A+B, supply throttling, 315 bar | | 2 |
| Pressure valves | | |
| without pressure reducing valve | | 0 |
| pressure reducing valve in A with pressure display | | 1 |
| pressure reducing valve and pressure relief valve in A with pressure display | | 2 |
| pressure reducing valve in P with pressure display | | 3 |
| pressure reducing valve in P and pressure relief valve in A with pressure display | | 4 |
| pressure reducing valve in P and pressure relief valve in B with pressure display | | 5 |
| pressure reducing valve in P and pressure relief valve in A + B with pressure display | | 6 |
| pressure relief valve in A | | 7 |
| pressure relief valve in B | | 8 |
| pressure relief valve in A + B | | 9 |
| Check valves | | |
| without intermediate plate check valves | | 0 |
| intermediate plate twin check valves in A + B max. 315 bar | | 1 |
| intermediate plate check valve in A max. 315 bar | | 2 |
| intermediate plate check valve in B max. 315 bar | | 3 |
| Switch | | |
| without switch | | 0 |
| hand switch, latching with pilot light green | | 1 |
| foot switch, latching with pilot light green | | 2 |
| 3-way selector switch, latching with pilot light green | | 3 |
| key switch, latching with pilot light green | | 4 |
| 2x hand switch, latching with pilot light green | | 5 |
| 2x foot switch, latching with pilot light green | | 6 |
| 2x key switch, latching with pilot light green | | 7 |

Power units in modular design

Switching symbols • Switch variants

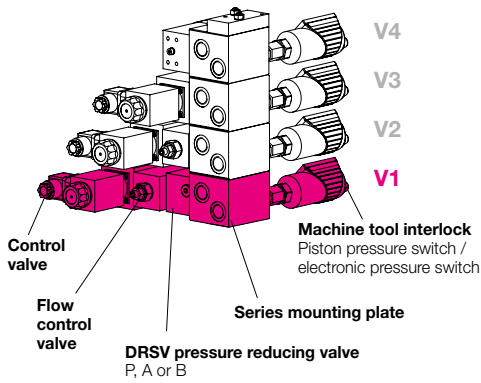

Valve block (max. 4 control circuits V1–V4)
 The equipment of the control circuits is based on the functional requirements of the application. The maximum pressures as well as the design-related differences in poppet and spool valves are to be considered.


Special versions
 Switch combinations and special switches are possible on request. It is also always possible to deviate from the prescribed standard. For example, more than 4 control circuits can be set up. It is possible to implement additional hydraulic functions. The electrical control can be designed even more individually up to the installation of programmable logic controllers and touch panels for human-machine communication.

Switching symbols


Control valves

3/2 directional poppet valve

V1-01
V1-03




V1-02
V1-04




4/2 directional spool valve

V1-15




4/3 directional poppet valve


V1-05
V1-06




with 4th switching function
Solenoid "a" and "b" operated



V1-07
V1-08




with 4th switching function
Solenoid "a" and "b" operated




Double 3/2 directional poppet valve


V1-09
V1-12



V1-10
V1-13




V1-11
V1-14



4/3 directional spool valve

V1-16




V1-17



V1-18



V1-19



Pressure switch

Piston pressure switch

V1-XX 1
V1-XX 2
V1-XX 3



Electronic pressure switch


V1-XX 4
V1-XX 5
V1-XX 6



Flow control valves

Flow control valve

V1-XX X 1
V1-XX X 2



Pressure valves

Pressure reducing valve

V1-XX X X1 V1-XX X X3




Pressure reducing valve with pressure relief valve

V1-XX X X2



V1-XX X X6




V1-XX X X4

V1-XX X X5

Pressure relief valve

V1-XX X X9




V1-XX X X7

V1-XX X X8

Check valves

Intermediate plate twin check valve

V1-XX X XX1




V1-XX X XX2

V1-XX X XX3

Switch Connecting cable 3 m, other lengths on request


Hand switch

V1-XX X XXX S1




Foot switch

V1-XX X XXX S2




3-way selector switch

V1-XX X XXX S3



Key switch

V1-XX X XXX S4



Types of valves

Poppet valves, hermetically sealed

| | |
|---------------------------|--|
| Adm. operating pressure | up to 500 bar |
| Adm. flow rate | up to 20 l/min |
| Flow direction | in the direction of the arrow as per symbol |
| Hydraulic oil | HLP 22 as per DIN 51524 |
| Connection | flange for mounting plate assembly |
| Type of mounting | 4 screws M5 (12.9) Tightening torque: 9.3 Nm |
| Nominal voltage | 24 VDC, +5 % / -10 % |
| Pick-up and holding power | 30 W |
| Make time | 60 ms |
| Brake time | 60 ms |
| Max. cycles | 2000 /h |
| Duty cycle | 100 % ED |
| Code class | IP 65 (IEC 60529) |
| Connection | cable socket as per DIN EN 175 301-803 and ISO 4400 |

Spool valves, leakage-afflicted

| | |
|---------------------------|--|
| Leakage rate | up to 20 ccm/min at 100 bar |
| Adm. operating pressure | up to 315 bar |
| Adm. flow rate | up to 80 l/min |
| Flow direction | in the direction of the arrow as per symbol |
| Hydraulic oil | HLP 32 or 46 as per DIN 51524 |
| Connection | flange, hole pattern as per DIN 24340, form A CETOP 4.2– 4.3, ISO 4401 for mounting plate assembly |
| Type of mounting | 4 screws M 5 (10.9) Tightening torque: 8.1 Nm |
| Nominal voltage | 24 VDC, + 10 % / -10 % |
| Pick-up and holding power | 30 W |
| Make time | 20 – 45 ms |
| Brake time | 10 – 25 ms |
| Max. cycles | 15000/h |
| Duty cycle | 100 % ED |
| Code class | IP 65 as per DIN 40050 |
| Connection | cable socket as per DIN EN 175 301-803 and ISO 4400 |

Other voltages and/or actuations available on request

Pressure reducing valves

| | | |
|------------------------------------|-------|----------|
| Max. input pressure | [bar] | 500 |
| Adjustable output pressure | [bar] | 30...380 |
| (other pressure ranges on request) | | |

Pressure relief valves

| | | |
|------------------------------------|-------|----------|
| Max. input pressure | [bar] | 500 |
| Adjustable reaction pressure | [bar] | 50...500 |
| (other pressure ranges on request) | | |

For the protection of pressure reducing valves, additional pressure relief valves are recommended.

Pressure switch variants

Electronic pressure switches

| | |
|--|---|
| Recommended hydraulic oil | HLP 22, 32 and 46 as per DIN 51524 |
| Pressure ranges | 0...600 bar |
| Excess pressure [bar] | 50 % of the nominal pressure (PN) |
| Pressure pick-up | Peak-value memory every 2 ms |
| Operating voltage | 12 to 32 V DC (residual ripple < 10 %), protected against reverse polarity |
| Voltage drop | < 2 V |
| Current consumption | < 60 mA |
| Switching outputs | 2 x pnp switching, no/nc 1 A short circuit protection switching output 2 is omitted if current output is parameterised |
| Delay time | 0 to 20 s, switch on and off delay separately adjustable |
| Range of adjustment switching point | 6 to 600 bar |
| Reverse switching point | 5 to 594 bar |
| Switching frequency | max. 125 Hz |
| Reproducibility | < ±0.1 % of the final value |
| Current output | if parameterised, switching output 2 is omitted 0/4 to 20 mA, 20 to 0/4 mA, starting point and final point selectable |
| Load | max. $RL [W] = (U_b - 8V) / 20 \text{ mA}$ |
| Error detection | analogue output in case of line break |
| Rise time | 5 ms (10 % to 90 % of PN) |
| Damping | 0 to 20 s, adjustable |
| Linearity deviation | max. ± 0.25 % of PN |
| System pressure display | 4 x 7 segment LED display |
| Display damping | 0 to 20 s, adjustable |
| Switching function display | 2x LED red |
| Operating temperature | -20 °C to +80 °C |
| Temperature drift | < ±0.2 % / 10 K (-10 °C to +70 °C) |
| Pressure port | G1/4A, SW 19 |
| Sensor head material | stainless steel 1.4435 |
| Housing material | PA 6.6, polyester |
| Code class | IP 65 as per EN 60529 |
| Electric connection | M12 connector 4-pin |
| As system pressure switch | Part no. 9740050* with teach-in function for easy system pressure adjustment |
| For machine tool interlock | Part no. 9740049* |

* Detailed operating instructions available on request


Mechanical pressure switch

| | |
|---------------|--|
| Piston switch | Technical data as per data sheet F 9.732 |
|---------------|--|

Power units in modular design

Type code "Electronics_EX"

Type code: PMXX_AXXX_V1-XX X XXX SX_V2-XX X XXX SX_V3-XX X XXX SX_V4-XX X XXX SX_EX

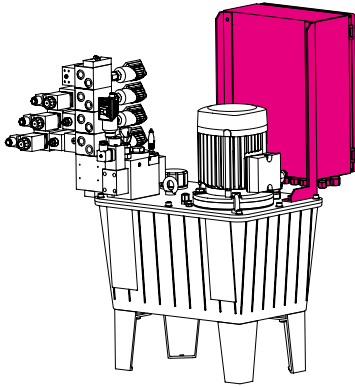

Electronics

The function triggering can be realised in various ways.

The following features are available for selection:

- **without electric control, without terminal box**
connection of the individual components and electric control provided by the customer
- **with terminal box, without electric control**
connections of the individual components are connected to the terminal strip of the terminal box, the connection will be made to the customer's electric control
- **with electric control**
function triggering by customer contacts or selected switches

| | | |
|--|--|-----------|
| | | EX |
| | without electric control, without terminal box. | 0 |
| | with terminal box | 1 |
| | with electric control and function triggering provided by the customer | 2 |
| | with electric control and function triggering in a common housing | 3 |
| | with electric control and function triggering in individual housings | 4 |

U = 3/ N / PE 400 V 50 Hz

Other voltages and frequencies of 1 Ph. 110 V to 3 Ph. 500 V 50/60 Hz on request.

Special approvals on request.

E2 - Function triggering provided by the customer:

Potential free contacts from a customer control.

E3 - Function triggering in a common housing:


The selected switches in control circuits are installed in one operating housing and connected to the electrical control.

E4 - Function triggering in individual housings:


The selected switches in the control circuits are designed as shown on page 9 and individually connected to the electric control.

Example power unit 11 litres


without electronics _E0

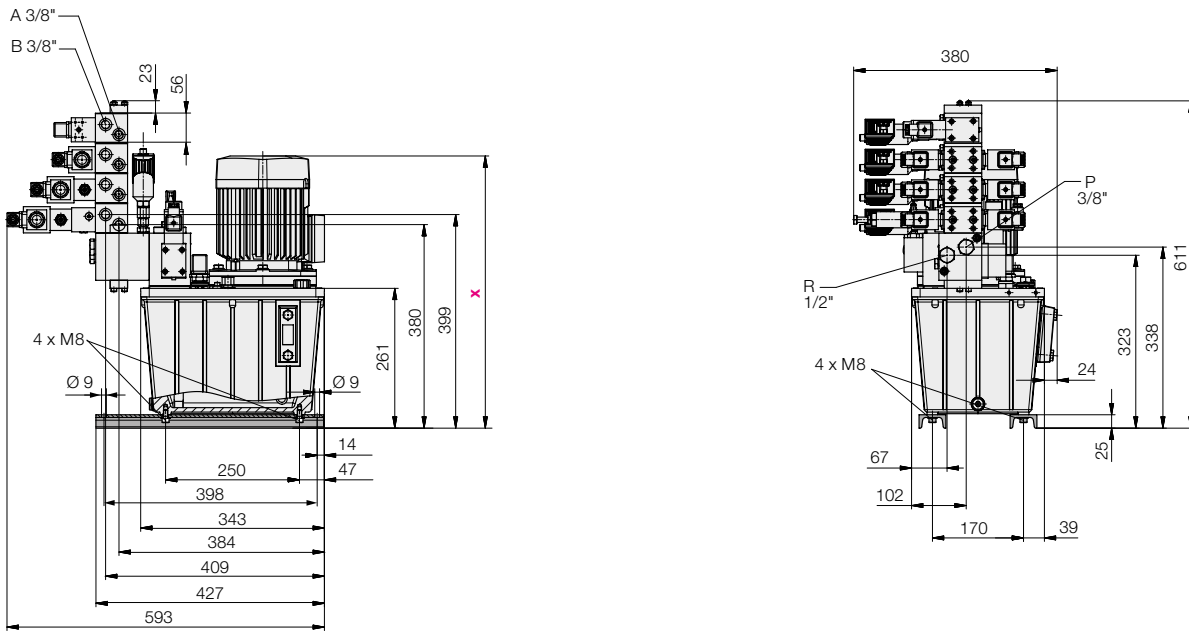

with terminal box _E1

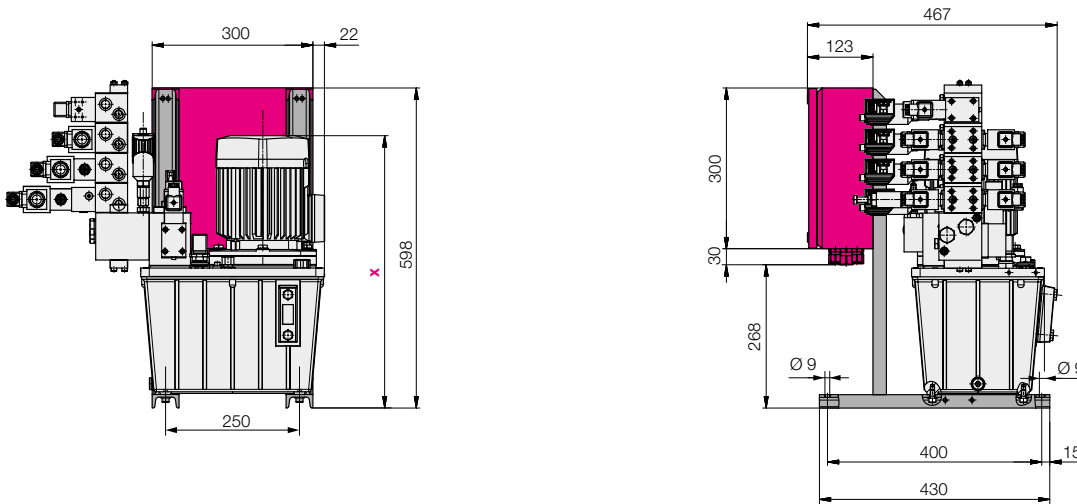

with electric control _E2

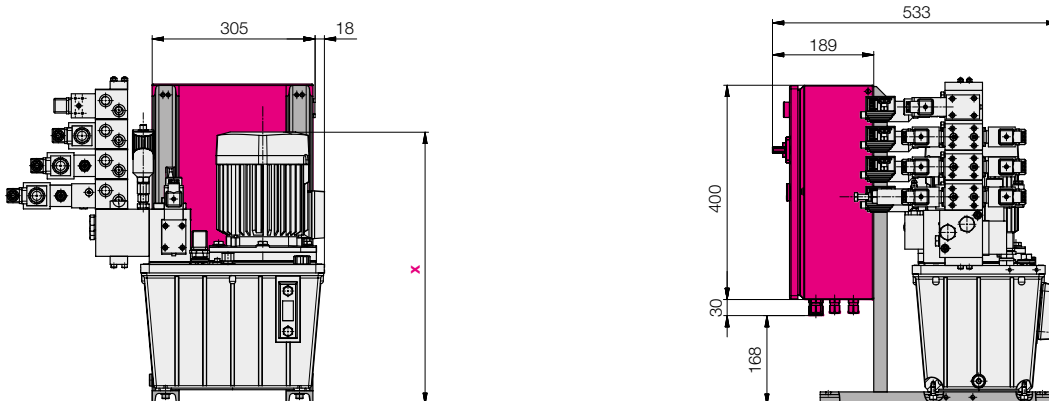

Dimensions in mm

Example power unit 11 litres

(Dimensions in mm)

Power unit 11 litres



| | | |
|----------------------|----------|-----|
| Motor 0.75 kW | x | 493 |
| Motor 1.1 kW | x | 509 |
| Motor 1.5 kW | x | 531 |

| Reservoir volume | Type code for example power unit | Part no.* |
|------------------|---|-----------|
| 11 | PM 03_A212_V1-054110S0_V2-054100S0_V3-074000S0_V4-014000S0_E0 | 8456004 |
| 11 | PM 03_A212_V1-054110S0_V2-054100S0_V3-074000S0_V4-014000S0_E1 | 8456003 |
| 11 | PM 03_A212_V1-054110S1_V2-054100S1_V3-074000S1_V4-014000S1_E2 | 8456002 |



* Orders can be placed with the type code or – if available – with the part number.

Example power unit 27 / 40 / 63 litres



without electronics _E0

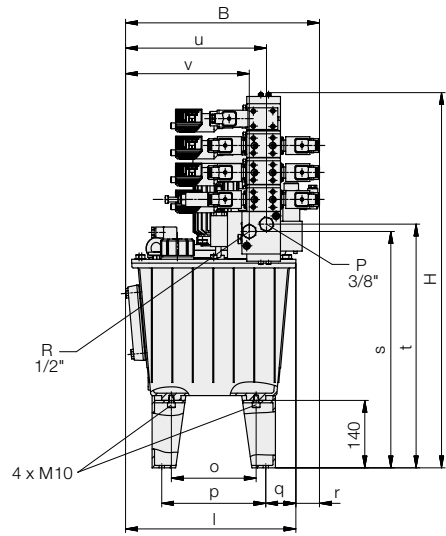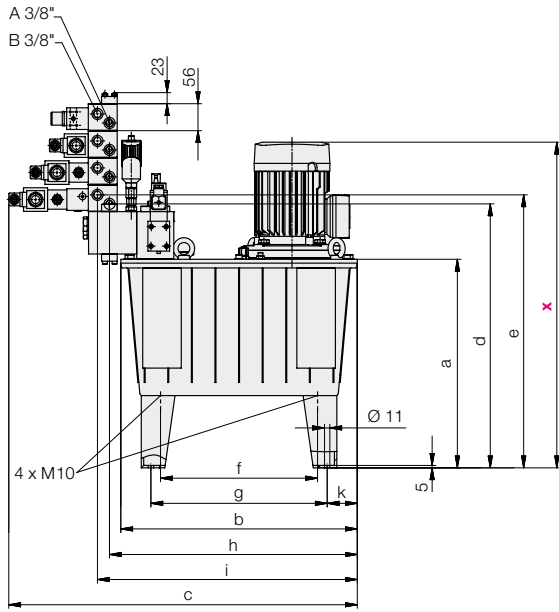

with terminal box _E1

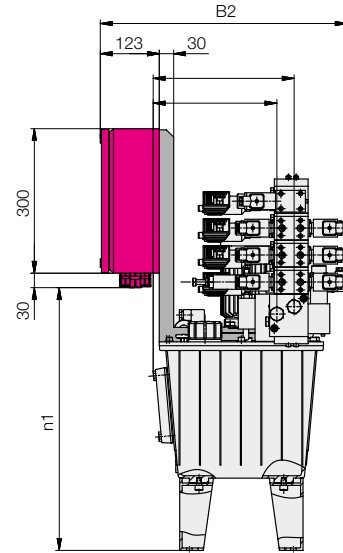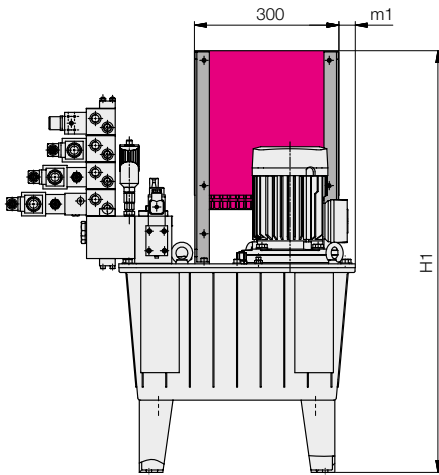

with electric control _E2

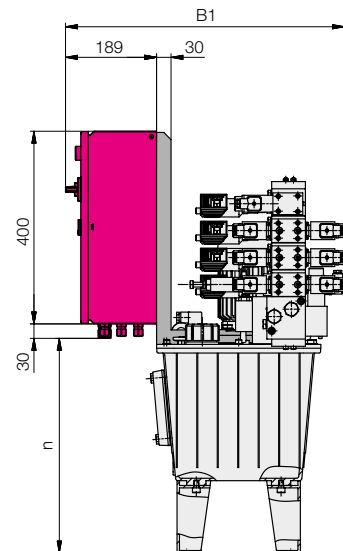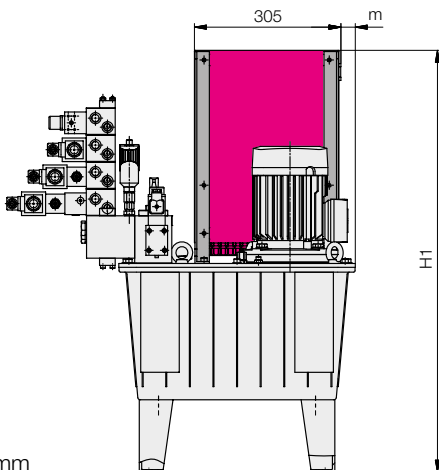

Dimensions in mm

Example power unit 27 / 40 / 63 litres

(Dimensions in mm)

| Dimension table power unit | 27 litres | 40 litres | 63 litres |
|----------------------------|-----------|-----------|-----------|
| Motor 0.75 kW x | 661 | 691 | 741 |
| Motor 1.1 kW x | 677 | 707 | 757 |
| Motor 1.5 kW x | 699 | 729 | 779 |
| Motor 2.2 kW x | 727 | 757 | 807 |
| Motor 3.0 kW x | | 784 | 834 |
| a | 433 | 463 | 513 |
| b | 491 | 525 | 615 |
| c | 724 | 758 | 848 |
| B | 403 | 485 | 539 |
| B1 | 579 | 662 | 712 |
| B2 | 513 | 596 | 646 |
| d | 548 | 578 | 628 |
| e | 567 | 597 | 647 |
| f | 326 | 341 | 423 |
| g | 366 | 381 | 463 |
| h | 515 | 549 | 639 |
| H | 779 | 809 | 859 |
| H1 | 876 | 906 | 956 |
| i | 540 | 574 | 664 |
| j | 233 | 233 | 233 |
| k | 63 | 72 | 77 |
| l | 354 | 436 | 490 |
| m | 30 | 41 | 66 |
| m1 | 34 | 45 | 70 |
| n | 446 | 476 | 526 |
| n1 | 546 | 576 | 626 |
| o | 176 | 241 | 283 |
| p | 216 | 281 | 323 |
| q | 63 | 72 | 76 |
| r | 49 | 49 | 49 |
| s | 491 | 521 | 571 |
| t | 506 | 536 | 586 |
| u | 293 | 375 | 429 |
| v | 257 | 339 | 393 |


| Reservoir volume | Type code for example power unit | Part no.* |
|------------------|--|-----------|
| 27 | PM10_A212_V1-054110S0_V2-054100S0_V3-074000S0_V4-014000S0_E0 | 8457 003 |
| 27 | PM10_A212_V1-054110S0_V2-054100S0_V3-074000S0_V4-014000S0_E1 | 8457 002 |
| 27 | PM10_A212_V1-054110S1_V2-054100S1_V3-074000S1_V4-014000S1_E2 | 8457 001 |
| 40 | PM22_A212_V1-054110S0_V2-054100S0_V3-074000S0_V4-014000S0_E0 | 8458 003 |
| 40 | PM22_A212_V1-054110S0_V2-054100S0_V3-074000S0_V4-014000S0_E1 | 8458 002 |
| 40 | PM22_A212_V1-054110S1_V2-054100S1_V3-074000S1_V4-014000S1_E2 | 8458 001 |
| 63 | PM39_A212_V1-054110S0_V2-054100S0_V3-074000S0_V4-014000S0_E0 | 8459 003 |
| 63 | PM39_A212_V1-054110S0_V2-054100S0_V3-074000S0_V4-014000S0_E1 | 8459 002 |
| 63 | PM39_A212_V1-054110S1_V2-054100S1_V3-074000S1_V4-014000S1_E2 | 8459 001 |

* Orders can be placed with the type code or – if available – with the part number.


Power units in modular design

Example configurations


PMXX_A1
intermittent cycle

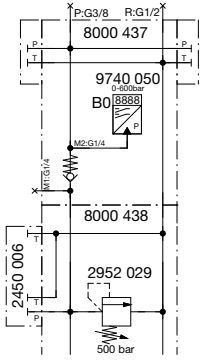


PMXX_A2...
unpressurised cycle, 500 bar

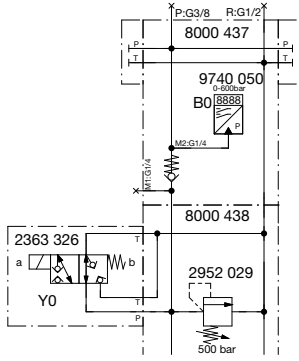


PMXX_AXXX_V1-011000...
1x single acting, 500 bar with MI in A

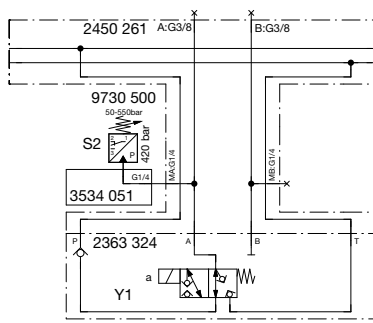


PMXX_AXXX_V1-XXXXXX_V2-000000...
2nd valve combination as reserve space, closed with a blind plate for later retrofitting

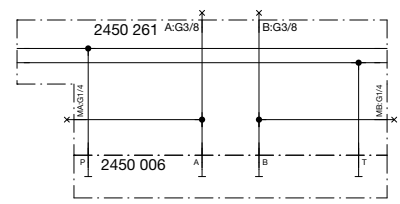


PMXX_AXXX_V1-053000...
1x double acting, 500 bar with MI in A+B

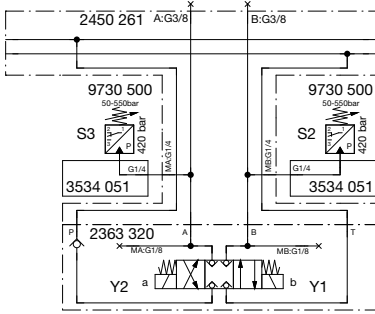


PMXX_AXXX_V1-093000...
2x single acting, 500 bar with MI in A+B

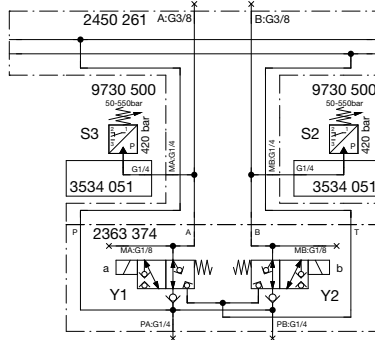


PMXX_AXXX_V1-050010...
1x double acting, valve 500 bar pressure reduction in A, 150 bar

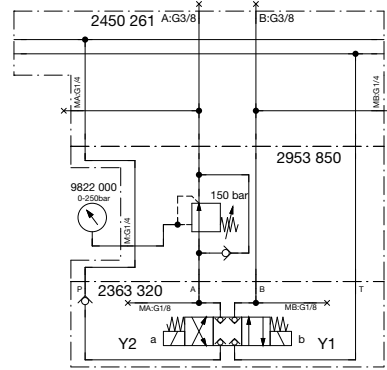


PMXX_AXXX_V1-050020...
1x double acting, valve 500 bar pressure reduction in P, 150 bar

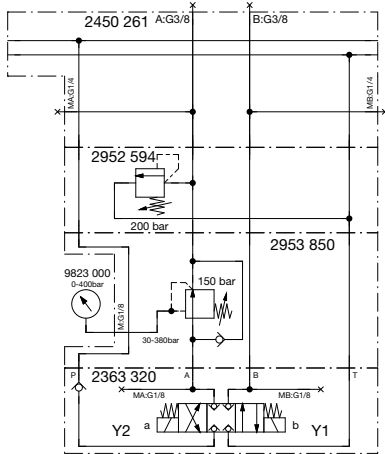


PMXX_AXXX_V1-050030...
1x double acting, valve 500 bar pressure reduction in P, 150 bar

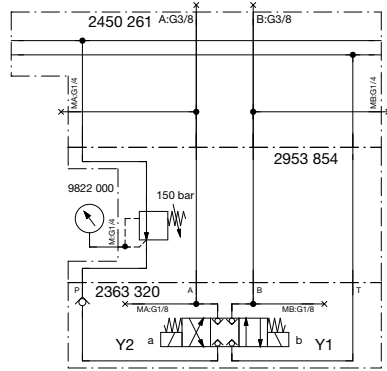

PMXX_AXXX_V1-050060...
1x double acting, valve 500 bar pressure reduction in P, 150 bar

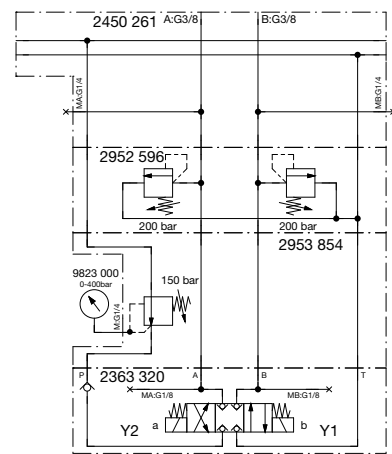

PMXX_AXXX_V1-170201...
1x double acting, 350 bar with twin flow control check valve and twin check valve

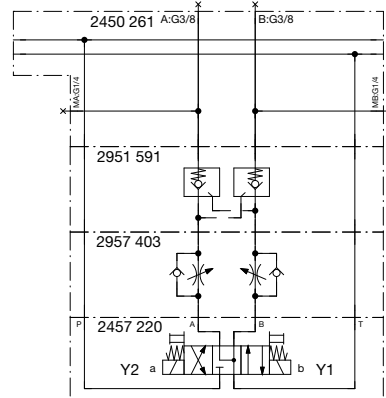

PMXX_AXXX_V1-151000...
1x double acting, 315 bar with MI in A one of the two pressure lines is always under pressure

