




Block Cylinders

double acting, with extended piston rod for position monitoring, max. operating pressure 500 bar

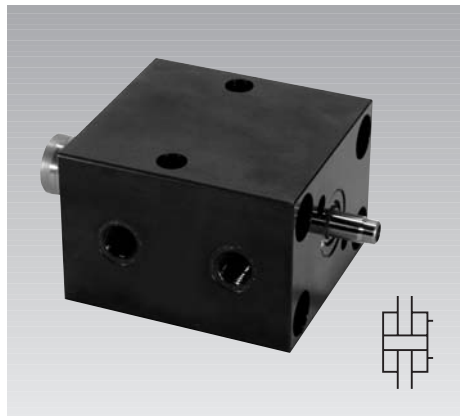

Application

Block cylinders with extended piston rods are used if one or several piston positions have to be controlled. Especially if

- standard inductive proximity switches should be used.
- the piston positions have to be adjusted on the spot.
- control has to be effected at the cylinder bottom due to space restrictions

Description

The piston is equipped with a rod of diameter 10 mm that protrudes at the cylinder bottom. At this rod the customer can fix a control cam that is used to operate any limit switch or sensor.

As an accessory a complete position monitoring system is available. This unit contains a control cam as well as two inductive proximity switches. The switches can be displaced in the housing. The housing will be screwed on at the cylinder bottom.

Material

Cylinder body: high alloy steel, black oxide
 Piston: case-hardening steel, hardened
 Sealings: FKM

Maximum operating temperature

Maximum admissible environmental and cylinder temperature (without accessory): 150 °C. When using accessories, pay attention to the maximum admissible environmental temperature. Especially for limit switches or sensors.

Important notes


- Tolerances, further operating conditions, and other data see data sheet A 0.100.

Advantages

- 8 sizes each with 2 stroke lengths available
- Compact block design
- Many fixing possibilities
- Many connecting possibilities
- Operating temperature up to 150 °C due to standard FKM seals
- Maintenance free
- Complete position monitoring available as accessory
- Position monitoring easily screwable
- Adjustable switching points
- Standard inductive proximity switches with external thread M8x1 can be used
- Inductive proximity switches up to 120 °C available


Fixing possibilities

Broad side with 2 cross holes



Cylinders must be backed up for operating pressures exceeding 160 bar.

Rod side with 4 mounting holes



Accessories


- Contact bolts (see accessories)
- Position monitoring (see page 4)

Available variants

- Stroke reduction by distance bushing
- Keyway at the broad side of the body to support the body
- Internal thread to fix the body at the bottom or front side (instead of mounting holes)

Hydraulic connecting possibilities


Fitting connection



Flange-type version with O-ring sealing


● **Broad side with 2 cross holes**

Version K - from 20 to 40 mm stroke




● **Broad side with 4 cross holes**

Version L - from 50 mm stroke




● **Rod side with 4 mounting holes**

Version S

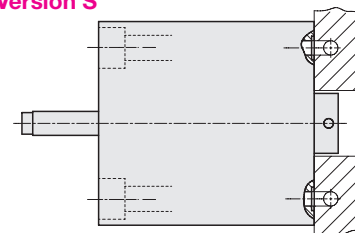


● **Bottom side with 4 mounting holes**

Version B




Dimensions

Pipe thread

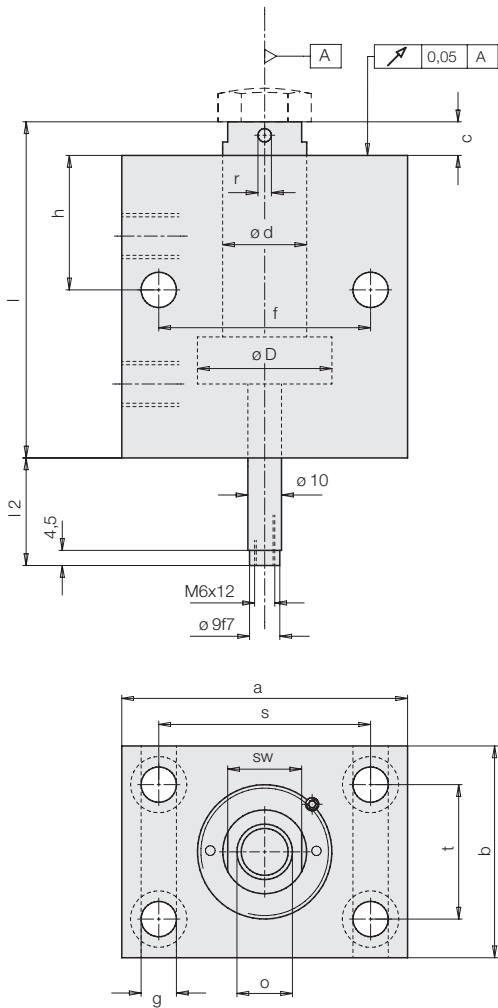

Version of the piston rod



Flange-type version with O-ring sealing

Version K

Broad side with 2 cross holes from 20 to 40 mm stroke

Version L


Broad side with 4 cross holes from 50 mm stroke

Version S

Rod side with 4 mounting holes

Version B

Bottom side with 4 mounting holes

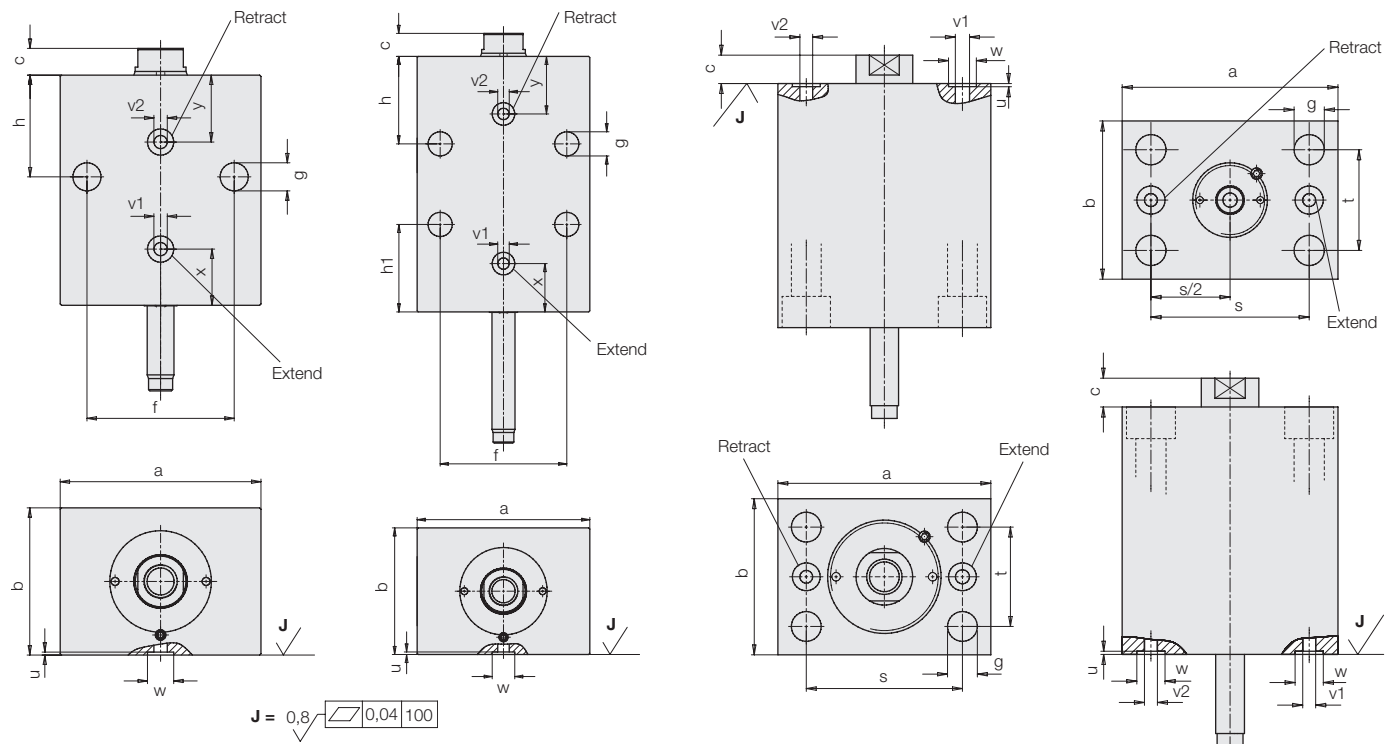

Dimensions Technical characteristics

Piston Ø D	[mm]	25	32	40	50	63	80	100	125
Rod Ø d	[mm]	16	20	25	32	40	50	63	80
Force to push at 100bar	[kN]	4.1	7.2	11.8	18.9	30.4	49.5	77.8	122
500bar	[kN]	20.6	36.2	58.9	94.2	152	247	389	610
Force to pull at 100bar	[kN]	2.9	4.9	7.7	11.6	18.6	30.6	47.4	72.4
500bar	[kN]	14.5	24.5	38.3	58	93	153	237	362
Oil volume per 10 mm stroke									
Stroke to extend	[cm ³]	4.1	7.2	11.8	18.9	30.4	49.5	77.8	122
Stroke to retract	[cm ³]	2.9	4.9	7.7	11.6	18.6	30.6	47.4	72.4
a	[mm]	65	75	85	100	125	160	200	230
b	[mm]	45	55	63	75	95	120	150	180
c	[mm]	7	10	10	10	14	14	15	16
f	[mm]	50	55	63	76	95	120	158	180
g	[mm]	8.5	10.5	10.5	13	17	21	25	32
h	[mm]	33	38	40	44	50	60	64	82
h1	[mm]	38	38	38	40	49	-	-	-
k	[mm]	22.5	27.5	31.5	37.5	47.5	60	75	90
m	[mm]	23	22	22	23	25	24	25	31
n	[mm]	18	22	24	27	26	34	35	47
o x depth of thread	[mm]	M10x15	M12x15	M16x25	M20x30	M27x40	M30x40	M42x60	M48x70
p		G 1/4	G 1/4	G 1/4	G 1/4	G 1/2	G 1/2	G 1/2	G 1/2
r	[mm]	-	-	4	4	4	5	6	8
s	[mm]	50	55	63	76	95	120	158	180
t	[mm]	30	35	40	45	65	80	108	130
u ± 0.05	[mm]	1.1	1.1	1.1	1.1	1.5	1.5	1.5	1.5
v1 extend	[mm]	4	5	6	6	8	8	8	8
v2 retract	[mm]	4	4.5	4.5	6	6	8	8	8
w +0.2	[mm]	9.8	9.8	9.8	10.8	13.8	13.8	13.8	13.8
x	[mm]	19.5	21	21	23	24	24	25	31
y	[mm]	21	25	27	29.5	32	39	40	47
SW	[mm]	13	17	-	-	-	-	-	-
Dimensions O-ring		7x1.5	7x1.5	7x1.5	8x1.5	10x2	10x2	10x2	10x2
Part-no. O-ring		3001-077	3001-077	3001-077	3000-275	3001-078	3001-078	3001-078	3001-078

Stroke ±1	[mm]	20	25	25	25	30	32	40	40
Total length l±1	[mm]	83	96	100	110	124	134	145	166
l1	[mm]	45	45	45	45	45	65	65	65
l2	[mm]	27	32	32	32	37	47	47	47
Weight	[kg]	1.4	2.3	3.1	4.8	8.3	14.8	24.9	39.1

Part-No.:

Version with pipe thread	1543-407	1544-407	1545-407	1546-407	1547-407	1548-407	1549-407	1550-407
Flange-type version	1543-407X	1544-407X	1545-407X	1546-407X	1547-407X	1548-407X	1549-407X	1550-407X

Stroke ±1	[mm]	50	50	50	50	50	50	50	50
Total length l±1	[mm]	113	121	125	135	144	152	155	176
l1	[mm]	65	65	65	65	65	65	65	65
l2	[mm]	57	57	57	57	57	57	57	57
Weight	[kg]	2	2.9	4.0	6.0	9.7	16.8	26.7	41.5

Part-no.

Version with pipe thread	1543-408	1544-408	1545-408	1546-408	1547-408	1548-408	1549-408	1550-408
Flange-type version	1543-408X	1544-408X	1545-408X	1546-408X	1547-408X	1548-408X	1549-408X	1550-408X

Code for part numbers for flange-type version

15XX-XXXX

Basic number
(from the chart)

- K** = Broad side with 2 cross holes, version from 20 to 40 mm stroke
- L** = Broad side with 4 cross holes, version from 50 mm stroke*
- S** = Rod side with 4 mounting holes
- B** = Bottom side with 4 mounting holes

Order:

Please add the identification letters **K, L, S, B** to the part-number of the required block cylinder.

Example of ordering:

Double-acting block cylinder 1545-407 with oil supply at the broad side **Part-no. 1545-407K**

* Sizes 1548- up to 1550-408L only with 2 cross holes available.

Accessory: Position monitoring


Description

The position monitoring will be screwed on at the cylinder bottom and can also be mounted in a position rotated by 180°. Different versions are available according to the application conditions. A control cam is provided at the extended piston rod causing the activation of the proximity switches. Adjustment of the switching position is effected by displacement of the proximity switches in the lateral groove. The proximity switches are switched on in a stroke range of approx. 6 mm by means of the control cam. The minimum distance to the positions to be monitored depends on the switch type and is indicated in the chart. The position monitoring can alternatively be supplied with or without proximity sensors.

Function


Electrical acknowledgement of both end positions or also intermediate positions.

Electric circuit diagram



Important notes

- Position monitoring systems are not suitable for applications where coolants are used.
- Additional covers also have to be provided against swarf.

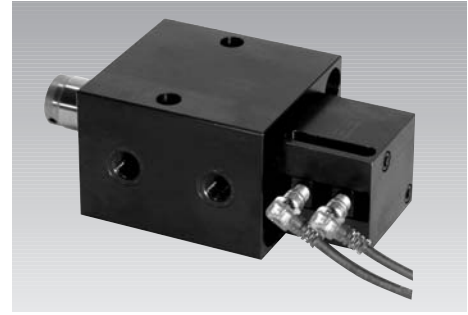

Block cylinder with position monitoring



Material of the body

Steel

Technical characteristics/dimensions



Standard version

Operating voltage UB	10 ... 30 V DC
Ripple	max. 15%
Switching function	Interlock
Basic technology	PNP
Material of housing	stainless steel
Code class as per DIN 40050	IP 67





Type A

Compact version



Type B Type C

for high environmental temperature



Environmental temperature TA	- 25° ... +70°C	- 25° ... +70°C	- 25° ... +120°C
Min. distance of the switching positions [mm]	13	8	8
Connection type	Plug	Plug	Teflon cable 3 x 0.14 mm ²
LED Function display	in the switch	in the plug	No
Max. constant current [mA]	200	100	200 – (exceeding 70°:100)
Nominal switch distance [mm]	1.5	1.5	2
Short circuit proof	Yes	Yes	No
Connecting cable [m]	5	5	3

Position monitoring with 2 proximity switches

up to 30 mm stroke	Part-no.	0382-300	0382-301	0382-302
L1 [mm] complete		45	45	45
up to 50 mm stroke	Part-no.	0382-310	0382-311	0382-312
L1 [mm] complete		65	65	65

Accessory/Spare proximity switch

Plug with cable	Part-no.	3829-088	3829-099	–
Proximity switch	Part-no.	3829-077	3829-263	3829-087

Position monitoring without proximity switch

up to 30 mm stroke	Part-no.	0382-303
up to 50 mm stroke	Part-no.	0382-313

Required dimensions for own inductive proximity switches

