





Hydraulic High-Pressure Hoses


assembled ready for connection, max. operating pressure 250/500 bar

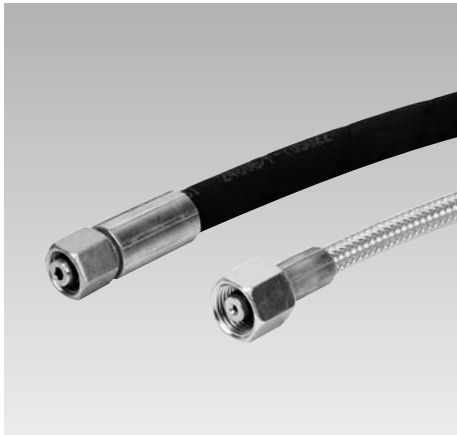

Hose structure

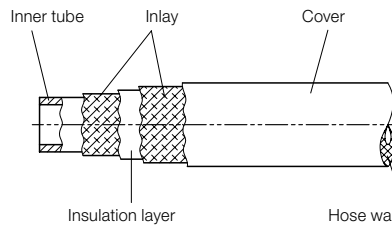

Hose union

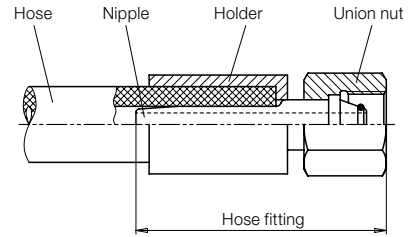

Depending on operating pressure and nominal diameter, high-pressure hoses consist of one or several layers of wire or textile mesh or spiral inlays.

After pressing of the hose fittings at both ends the high-pressure hose is ready for connection.

Application

High-pressure hoses are used for energy and signal transmission in hydraulic systems. Especially when connecting movable elements, but also for the connection of hydraulic subassemblies which are not fixed on a common base, e.g. power units and clamping fixtures.

Advantages


- Quadruple safety
- Every desired length available
- Preferred lengths available from stock
- Marking with manufacturing date as per DIN EN
- ND 4 - high-pressure hose in series with wire braiding

Service life


The application time including storage time should not exceed 6 years, the net storage time 2 years. High temperatures, frequent motion cycles or high pulse frequencies can reduce the application time.

Mounting instructions

Upsetting or tensile stress

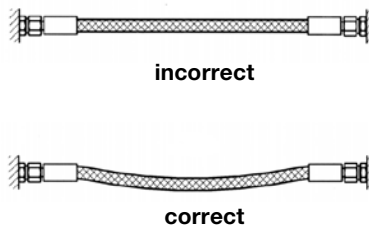


Mechanical damage

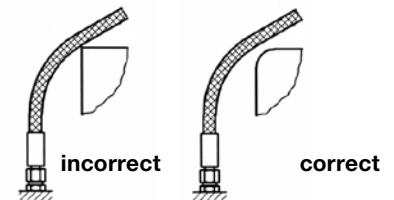


Maintenance

Before putting into operation and then at least once a year, the high-pressure hoses have to be checked by an expert if they are still leak-proof.

Bending radii

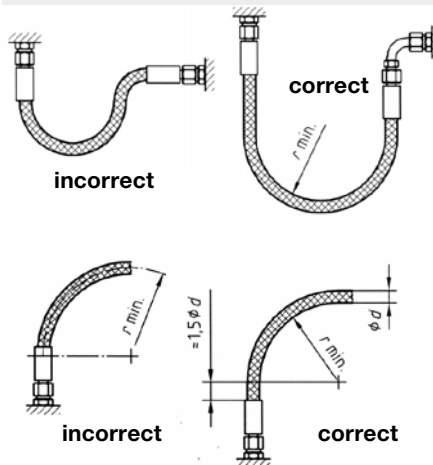

Torsional stress

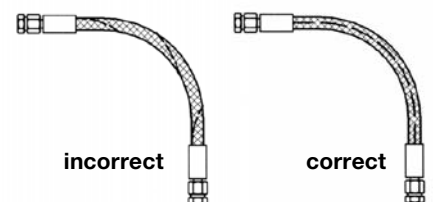


Important notes

Inappropriate installation, use and maintenance can reduce the service life of high-pressure hoses.

Dimensions

Technical Characteristics • Part-no.

Dimensions / Technical characteristics

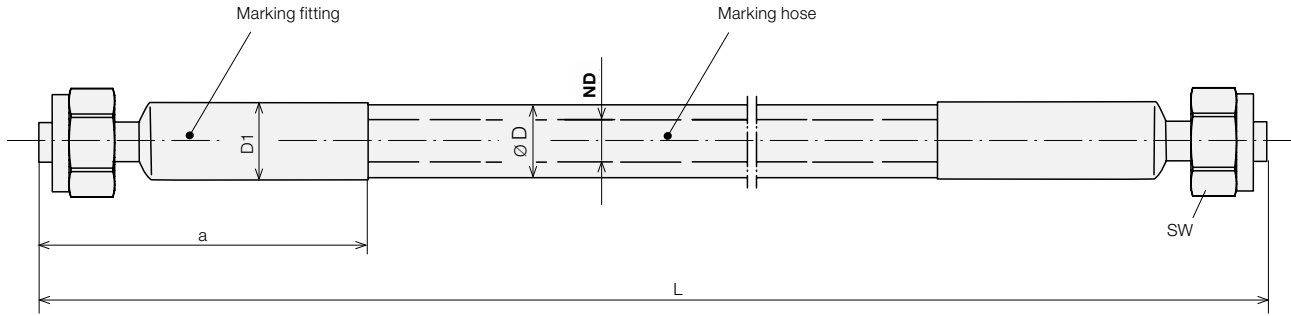

High-pressure hose	ND	4	4	6,3	6
Max. operating pressure	[bar]	250	500	250	500
Connection size		8L	8S	8L	8S
Union nut		m8L	m8S	m8L	m8S
SW	[mm]	17	19	17	19
D hose Ø	[mm]	9,5*	9,5*	15	17,5
D1 holder Ø	[mm]	13	13	19	19
Min. bending radius	[mm]	50	50	100	100
Fitting length a	[mm]	42	42	50	52
Minimum length	[mm]	150	150	200	200
Specific increase in volume per bar and meter	$\left[\frac{\text{cm}^3}{\text{bar} \cdot \text{m}} \right]$	0.006	0.006	0.008	0.006
Part-no.		93751-XXXXX	93752-XXXXX	93206-XXXXX	93706-XXXXX

Preferred lengths:	L =		93751-00500	93752-00500	93206-00500	93706-00500
	500	[mm]				
	1000	[mm]				
	1600	[mm]				
	2500	[mm]				

* with wire braiding

Marking hose

On the hose there is the following marking:

- Name or code of the manufacturer
- Number of European standard
- Type
- Nominal diameter
- Quarter and the last two figures of the year of manufacture

Marking fitting

On the fitting there is the following marking:

- Name or code of the manufacturer
- Month of manufacture
- The last two figures of the year of manufacture
- Nominal pressure PN of the hose fitting
- Part-no. of the complete high-pressure hose

Important notes!

We deliver only completely pressed high-pressure hoses with mounted union nut. Pipe sockets with removable cutting ring and union nut are no longer allowed.

Code for part numbers

93XXX - XXXXX

Hose length L in mm

Gradation: 5 mm

Example: L = 750 mm : **00750**

(Pay attention to the minimum length as per chart)

Nominal diameter, union nut and nominal pressure

751 : ND 4 – m8L – 250 bar

752 : ND 4 – m8S – 500 bar

206 : ND 6,3 – m8L – 250 bar

706 : ND 6 – m8S – 500 bar

Length tolerance as per DIN 20066

Hose length L	Tolerance
≤ 630 mm	+7 / -3 mm
631 – 1250 mm	+12 / -4 mm
1251 – 2500 mm	+20 / -6 mm
2501 – 8000 mm	+1,5 / -0,5 %
> 8001 mm	+3 / -1 %